


All pieces are 5/4" thick Black Locust
Edges should be rounded, surfaces lightly sanded



Countersink nuts on inside

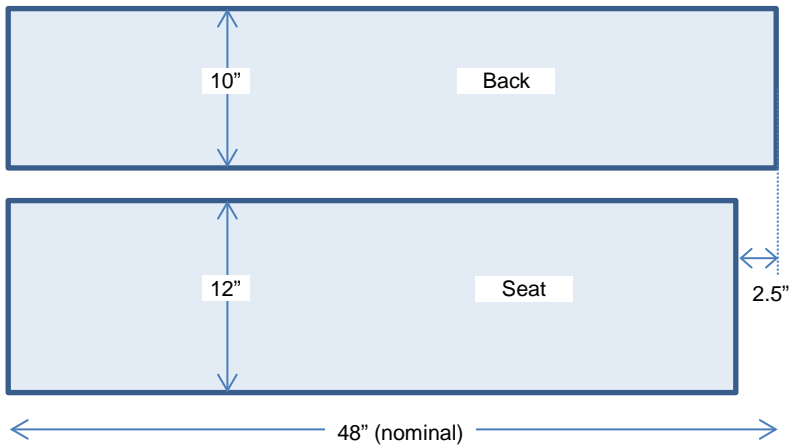


Screw seat to back legs



Screw back to front legs



Set back into front legs for comfort

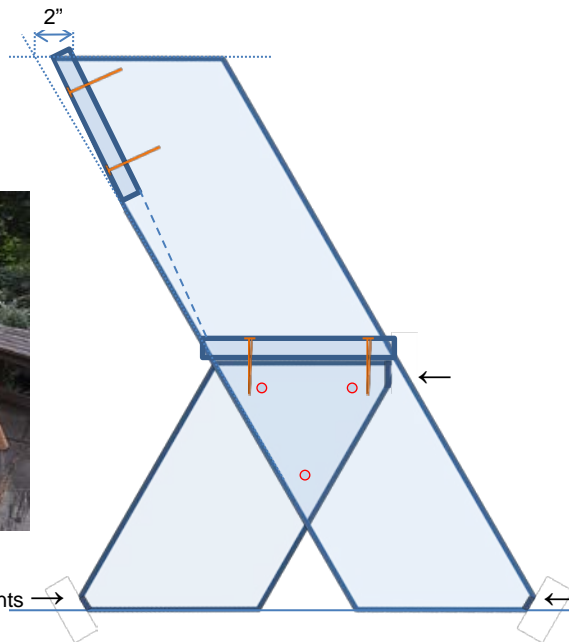

Qty 8 - 4-1/2" HeadLok Screw



Qty 6 - 3/8-in-16 x 2-1/2-in Hot-Dipped Galvanized Carriage Bolt



Qty 6 - 3/8-in-16 Hot-Dipped Galvanized Standard (SAE) Hex Nuts

Leopold Bench <http://www.aldoleopold.org/AldoLeopold/LeopoldEvents.shtml>

Roger Hopkins, Ithaca, NY <http://naturalhighs.net/waterfalls/misc/BuildLeopoldBench.html>